



Lever Isolator Switch with Red Actuator Handle

Cole Hersee Co. #75920B

www.colehersee.com.au

DESCRIPTION

SPST On/Off battery isolator switch with red actuator handle.
6-36V, 300A continuous, 1000 to 3000A intermittent.
Features silver laminated contact, weather resistant O'ring seal on mounting shaft. 3/4" mounting stem. Suits 12mm panel thickness.




FEATURES

- Level type isolator switch with red actuator handle
- Complies with SAE & J1455 industrial standard
- SPST configuration
- Silver laminated contacts
- O-ring sealed mounting shaft for weather resistance
- Indexing pin aligns switch and prevents rotation
- Suits panel thickness to 12mm
- 300A continuous field terminal amperage
- Mounting stem 3/4" - 16 thread, L 22mm

TECHNICAL SPECIFICATIONS

DIMENSIONS

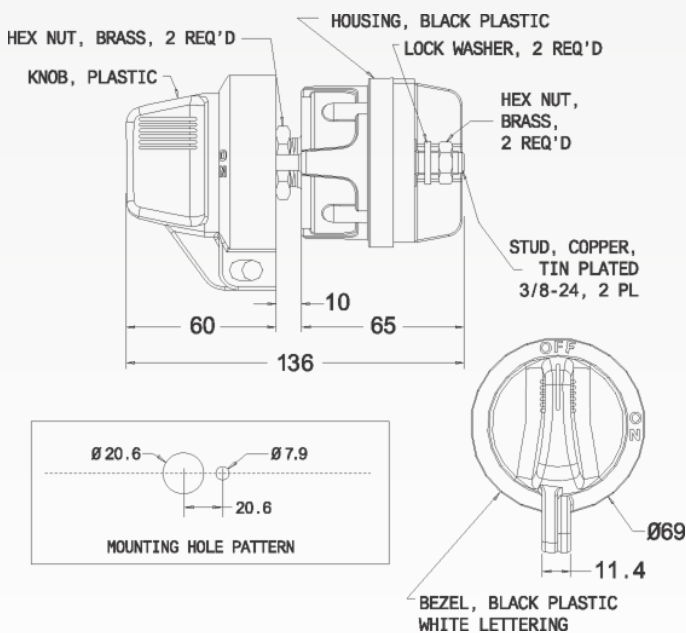

Voltage	• 6 - 36V multi-volt
Maximum Amperage	• 1000A to 3000A Intermittent
Continuous Amperage	• 300A continuous
Configuration	• SPST
Dimensions	• 136mm x 69mm Ø
Contact Material	• Silver contacts
Mounting Stem	• 3/4" - 16 thread
Battery Stud Size	• 3/8" - 24 stud
IP Rating	• IP68 Rated
Operating Temperature	• -40°C to 85°C
Approvals	• SAE & J1455 approved