



DRC Series Receptacles

Sold Individually

www.te.com




DESCRIPTION


These industry proven connectors are environmentally sealed to IP68 standards. Able to be used in both in-line and bulkhead applications. Specifically designed for the truck, mining and construction industry. Features a heavy duty thermoplastic housing and silicon rubber seal with an operating temperature of -55°C to 125°C. Size 16 pins - rated 13A.

Connector System	• Wire to Wire	Body Material	• PPS GF
Sealable	• Yes	Mating Pin Diameter	• 1.59mm
Primary Locking Feature	• Contact Retainer	Contact Current Rating	• 13 Amps per Circuit
Voltage	• Up to 250V DC	Operating Temperature	• -55°C - 125°C
IP Rating	• IP68, IP6K9K	Flammability	• UL Recognized, Standard UL-94
Cable Exit Angle	• 180°	Approvals	• SAE J2030


HOUSING CONFIGURATIONS



1*24
24 x size 16



1*40
40 x size 16

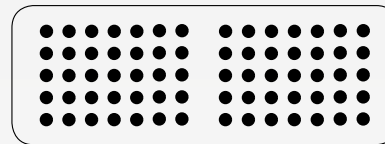

1*70
70 x size 16

AMPERAGE RATING
Size 16: 13 Amps per Circuit

PART NUMBERS

Flange Mount Receptacles

Part Number.	Dimensions (mm)	Mounting Type	Description
DRC12-24PA	• 44.25 L x 53.09 H x 77.22 W	• Flange Mount	• 24 circuit DRC flange mount receptacle. Takes 24 x size 16 Pins.
DRC12-40PA	• 43.15 L x 53.29 H x 97.54 W	• Flange Mount	• 40 circuit DRC flange mount receptacle. Takes 40 x size 16 Pins.
DRC12-70PA	• 44.63 L x 58.93 H x 126.82 W	• Flange Mount	• 70 circuit DRC flange mount receptacle. Takes 70 x size 16 Pins.

In-Line Receptacles

Part Number.	Dimensions (mm)	Mounting Type	Description
DRC14-24PA	• 44.25 L x 30.53 H x 54.71 W	• In-Line	• 24 circuit DRC In-Line mount receptacle. Takes 24 x size 16 Pins.
DRC14-40PA	• 43.15 L x 53.29 H x 97.54 W	• In-Line	• 40 circuit DRC In-Line mount receptacle. Takes 40 x size 16 Pins.
DRC14-70PA	• 44.63 L x 36.09 H x 103.99 W	• In-Line	• 70 circuit DRC In-Line mount receptacle. Takes 70 x size 16 Pins.