



**DTHD Series 60A**  
**Deutsch Connector Kit**  
#DTHD1-08KIT


www.te.com



**DESCRIPTION**

Heavy duty 60 Amp single circuit DTHD connector kit.


Complete with male & female housing & terminals. Deutsch DTHD Series are environmentally sealed connectors, specifically designed for cable to cable applications on the engine or transmission, under the hood, on the chassis or in the cab. Where even a small degradation & signal level in connection may be critical, the DTHD Series heavy duty connectors will provide reliability and performance.

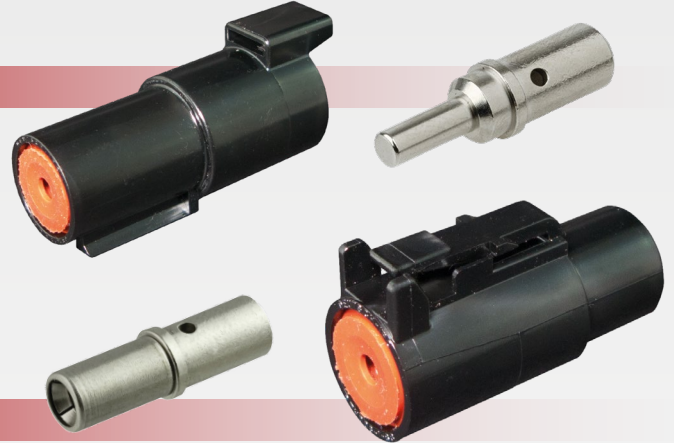


**FEATURES**

- Accept contact size 8 (8 B&S auto cable)
- Up to 60 Amp withstanding amperage
- Polyetherimide housing
- Intergrated latch for mating, easy to install
- Compact and environmentally sealed to IP68 standard

**DIMENSIONS**



26.54mm W x 29.72mm H x 52.53mm L  
DTHD04-1-8P



22.23mm W x 27.33mm H x 38.05mm L  
DTHD06-1-8S

**COMPONENTS**

No.	Part No.	Description
• 1	• DTHD04-1-8P	• Single circuit DTHD series receptacle housing to take size 8 male pin.
• 2	• P8/1	• Size 8 male pin. Takes 8 B&S auto cable.
• 3	• DTHD06-1-8S	• Single circuit DTHD series plug housing to take size 8 female socket.
• 4	• S8/1	• Size 8 female socket. Takes 8 B&S auto cable.

**TECHNICAL SPECIFICATIONS**

<b>Operating Temperature</b>	• -55° C to 125° C
<b>Amperage</b>	• 60 Amps per circuit
<b>Connector System</b>	• Wire to wire
<b>Body Material</b>	• PEI (Polyetherimide)
<b>Primary Locking Feature</b>	• Integrated in housing
<b>Mating Pin Diameter</b>	• 4mm
<b>IP Rating</b>	• IP68 rated

<b>Circuit Application</b>	• Power & signal
<b>Durability Resistance</b>	• No damage after 100 re-engagement
<b>Dielectric Withstand</b>	• Less than 2mA @ 1500V AC
<b>Insulation Resistance</b>	• 1000 Megaohms min @ 25° C
<b>Moisture Resistance</b>	• 3 feet immersion with proper wiring
<b>Vibration Resistance</b>	• No mechanical / physical damage @ 20Gs rms at 10 to 2000Hz