



HD10 Series Plug

Sold Individually


www.te.com



DESCRIPTION


These industry proven connectors are sealed to IP68 standards. Equipped with thermoplastic housing and silicon rubber seals, perfect for harsh environments.

Takes size 16 pins. Rated at 13 Amps per circuit.

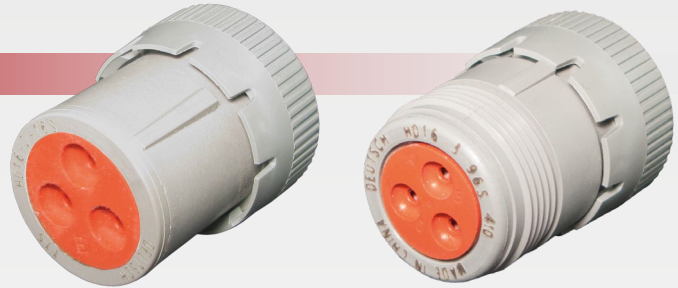


FEATURES


CONFIGURATIONS




3-16/3-96
3 size 16




5-16
5 size 16



6-96
6 size 16



9-16
9 size 16



9-96
9 size 16

Threading:

- X-16: Non threaded rear
- X-96: Threaded rear

IP Rating	• IP68 rated	Voltage Rating	• 250 Volt DC
Operating Temperature	• -55 to 125°C	Flammability Rating	• UL 94V-1

TECHNICAL SPECIFICATIONS

Part Number.	Dimensions (mm)	Terminals	Threaded	Descriptions
HD16-3-16S	• 27.14 W x 40.87 H x 27.14 L	• 3 x size 16	• No	• 3 circuit HD10 in-line plug. Takes pins
HD16-3-96S	• 27.1 W x 40.87 H x 27.15 L	• 3 x size 16	• Yes	• 3 circuit HD10 in-line plug with thread. Takes pins
HD16-5-16S	• 30.94 W x 40.87 H x 30.94 L	• 5 x size 16	• No	• 5 circuit HD10 in-line plug. Takes pins
HD16-6-96S	• 36.89 W x 40.61 H x 36.89 L	• 6 x size 16	• Yes	• 6 circuit HD10 in-line plug with thread. Takes pins
HD16-9-16S	• 40.35 W x 40.88 H x 40.35 L	• 9 x size 16	• No	• 9 circuit HD10 in-line plug. Takes pins
HD16-9-96S	• 41.46 W x 40.39 H x 41.46 L	• 9 x size 16	• Yes	• 9 circuit HD10 in-line plug with thread. Takes pins