

ionnic |  LED Warning Bar -
2 LED Module
#LSWLS-32

www.ionnic.com


DESCRIPTION

12-24V high output LED warning bars with a wide viewing angle. Up to 17 flash patterns with dimming function and virtually unlimited colour (at request) combination which can be synchronised. Polycarbonate lens and environmentally sealed to IP67 rated. LED's rated to 100,000 hours of operation. Supplied with rear bolt mount and side brackets. Clear lens when not illuminated. Comes with 5 year manufacturer warranty.



TECHNICAL SPECIFICATIONS

Dimensions

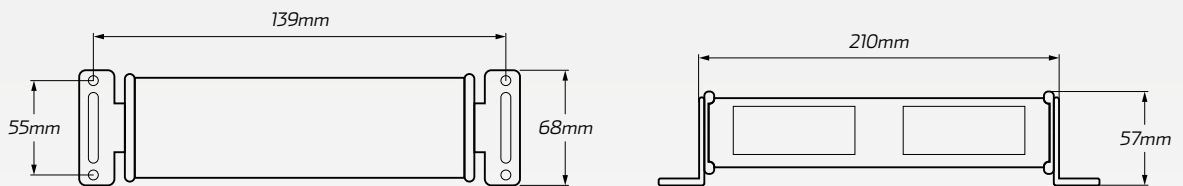

Input Voltage	• 12 - 24 Volt	IP Rating	• IP67 rated
Lens Material	• Polycarbonate lens	LED Modules	• 2 x LED Modules
Body Material	• Aluminium	Estimate LED Life	• 100,000 hours of operation
Flash Patterns	• 17 flash patterns	Approvals	• SAE-W-07
Pre-wired Cable	• 1 metre	Dimensions	• 210mm W x 57mm H x 68mm D

PART NUMBERS

Part Number.	LED Colour	Current Draw	Descriptions
LSWLS-32A	• Amber	• 0.7 Amp @ 12 Volt	• 12 - 24 Volt, LED Warning Bar with 2 LED Modules - Amber LED
LSWLS-32B	• Blue		• 12 - 24 Volt, LED Warning Bar with 2 LED Modules - Blue LED
LSWLS-32G	• Green		• 12 - 24 Volt, LED Warning Bar with 2 LED Modules - Green LED
LSWLS-32R	• Red		• 12 - 24 Volt, LED Warning Bar with 2 LED Modules - Red LED
LSWLS-32W	• White		• 12 - 24 Volt, LED Warning Bar with 2 LED Modules - White LED
LSWLS-32RB	• Red/Blue		• 12 - 24 Volt, LED Warning Bar with 2 LED Modules - Red/Blue LED