

QVEE
AUTOMOTIVE | MINING | MARINE

Pre-wired
Square DIN Lead
Sold Individually

www.qvee.com.au

DESCRIPTION

Square DIN lead plug with a pre-wired cable, suitable for 12 or 24 Volt application. IP67 rated.



Encapsulated terminals, good resistance to chemicals and oil.

Plug type form A. 2 Pole connection.



FEATURES

- 12/24 Volt applications
- IP67 rated water and dustproof
- PVC cable insulation
- Manufactured in Europe
- Conforms to CE specifications

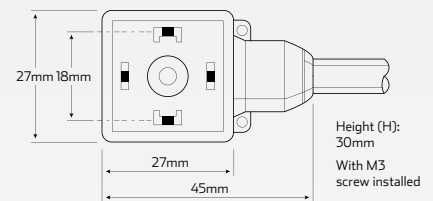

TECHNICAL SPECIFICATIONS

Suitable Voltage	• 12 / 24 Volt applications	Housing Material	• Plastic, encapsulated
Withstanding Voltage	• 240V AC/DC +/- 25%	Chemical & Oil Resistance	• Yes, when properly installed
Cable Size	• 0.75mm ²	IP Rating	• IP67, when properly installed
Cable Material	• Copper	Operating Temperature	• -30°C to 70°C
Cable Insulation	• Black PVC	Approvals	• Conform to CE specifications

TECHNICAL SPECIFICATIONS

Part Number.	Voltage	Connection	Cable Length	Description
QVDINLEAD3M	• 12/24 Volt	• 2 pin + earth	• 3m pre-wired cable	• 2 pin + earth square DIN connector with 3m pre-wired cable
QVDINLEAD5M	• 12/24 Volt	• 2 pin + earth	• 5m pre-wired cable	• 2 pin + earth square DIN connector with 5m pre-wired cable