



280 Series Lamp with Conversion Cable

#280ARWM2LR12/450


www.ledautolamps.com




FEATURES

- Helps solve canbus vehicle errors when fitting LED's
- Terminated with DT04-6P male connector
- Include 2 prewired load resistors
- ECE approved lamp
- 5 year warranty
- IP67 water & dustproof


DIMENSIONS

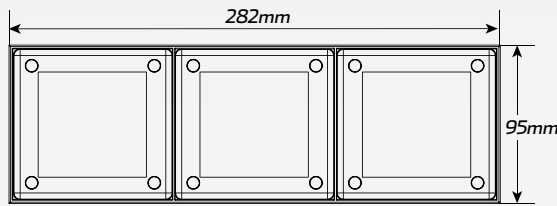

Front

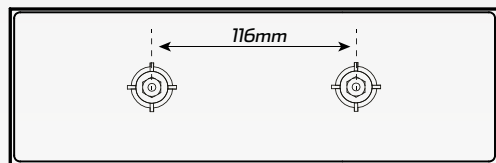

Back

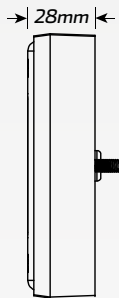

Side

FITTING INSTRUCTIONS

Surface mount onto flat surface horizontally with stainless steel bolts provided in assembly and run cable through 12mm hole. Please refer to ADR 13/00 for mounting instructions.

12V IP67 ECE/ADR **5 YEAR WARRANTY**

REPLACEMENT LED'S



P/N. 280WM



P/N. 280RM



P/N. 280AM

TECHNICAL SPECIFICATIONS

| | |
|--------------|---|
| LED Quantity | • 36 LED's |
| Voltage | • 12V only (24V available as special order) |
| Cable Length | • 45cm, 2 x LR12, DT04-6P male plug |
| Function | • Stop/Tail, Indicator, Reverse, Reflectors |
| Dimensions | • 282mm W x 95mm H x 28mm D |
| IP Rating | • IP67 rated |
| Warranty | • 5 year warranty |

| | |
|-----------|---|
| Amperage | <ul style="list-style-type: none"> • Stop: 0.70A @ 13.8V, 2.14A @ 28V • Tail: 0.08A @ 13.8V, 0.24A @ 28V • Indicator: 0.35A @ 13.8V, 0.93 @ 28V • Reverse: 0.17A @ 13.8V, 0.13A @ 28V |
| Approvals | <ul style="list-style-type: none"> • Stop/Tail: ECE R1-S1-E9-02.11544 • Indicator: ECE 2a-E9-01.11545 • Reverse: ECE AR-E9-00.1207 |