

QVEE

AUTOMOTIVE | MINING | MARINE

www.qvee.com.au

Toyota Tail Light
Extension Harness

#CAB-2152003

DESCRIPTION


Toyota tail light extension harness.

Pre-wired to a male socket & female socket connector
with 600mm (total) cable, protected with sealed nylon tubing.

Plugs directly, offers a quick & easy solution for installation in tight spaces.



DIMENSIONS

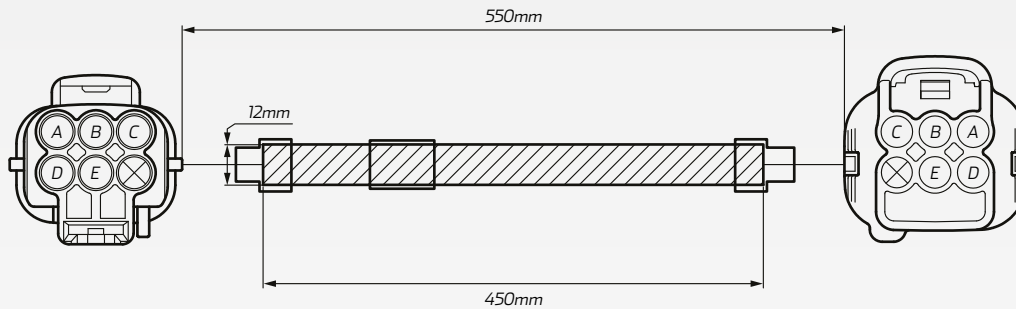

Wire Colours

- A: Green with white trace
- B: Black with white trace
- C: Green with yellow trace
- D: Red with blue trace
- E: Green

TECHNICAL SPECIFICATIONS

Connector Specifications

Cable Size	• 16 AWG
Cable Material	• Tinned copper
Thread Size	• 26/0.254 +/- 0.009
Nominal Thickness	• 0.38mm
Minimum Thickness	• 0.33mm
Insulation Material	• PVC
Outer Diameter	• 2.40 +/- 0.10
Resistance Rating	• 14.6 Max Ohm/Km, 20°C
Approvals	• Meets UL1007-16AWG

Cable Specifications

Temperature Rating	• 80°C nominal
Voltage Rating	• 300 Volt Max
Dielectric Withstand	• Passed (2000V test)
Insulation Spark Test	• Passed (3000V test)
Tensile Strength	• 1.05kgf/mm ²
Elongation	• Unaged: 100 min.
Heat Shock Test	• No cracking
Cold Bend Test	• No cracking
Deformation Test	• Max at 50%
Flame Approval	• Pass, meets UL VW-1