

## Britax 5 Pin Relays - Change Over

Sold Individually


www.britaxbeacons.com.au

### DESCRIPTION

Change over 5 pin relay. Meets ISO9001 requirements.  
Suitable for wide range automotive or electrical applications.


### FEATURES:

- Epoxy sealed, water & dust protected (IP67)
- Silver contacts AgSnO2
- Supplied with snap in mounting bracket
- Engage: 70% of V, Disengage: 20% of V



### TECHNICAL SPECIFICATIONS

<b>Conductor Material</b>	• Copper braid load conductor
<b>Contact Material</b>	• Silver contacts
<b>Terminal Size</b>	• Switch: 6.3mm
<b>Approvals</b>	• ISO9001, QS9000, ISO/T16949 • CE, UL, CSA, TUV

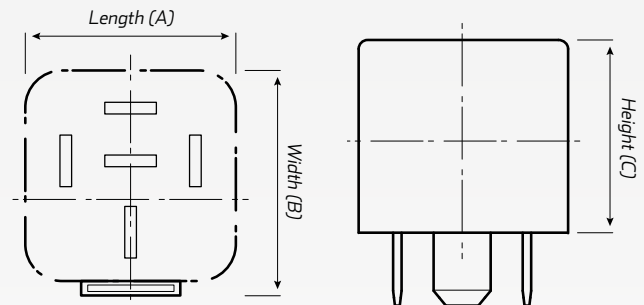

### PART NUMBER

Part Number	Volt	Amp	Protection	Dimensions (A x B x C)	Description
RC-1230RB	12V	40/30A	Resistor	26.5mm x 26.5mm x 24.5mm	12 Volt, 40/30 Amp, 5 pin C/O relay with resistor protection. Comes with snap in mounting bracket.
RC-1240RB	12V	40/40A	Resistor	29mm x 29mm x 26.5mm	12 Volt, 40/40 Amp, 5 pin C/O relay with resistor protection. Comes with snap in mounting bracket.
RC-1260RB	12V	60/80A	Resistor	29mm x 29mm x 26.5mm	12 Volt, 60/80 Amp, 5 pin C/O relay with resistor protection. Comes with snap in mounting bracket.
RC-2440RB	24V	20/20A	Resistor	29mm x 29mm x 26.5mm	12 Volt, 20/20 Amp, 5 pin C/O relay with resistor protection. Comes with snap in mounting bracket.